


This drawing and the information contained herein, is the sole property of Steelgal NZ Limited and may not be used without consent from Steelgal NZ Limited.

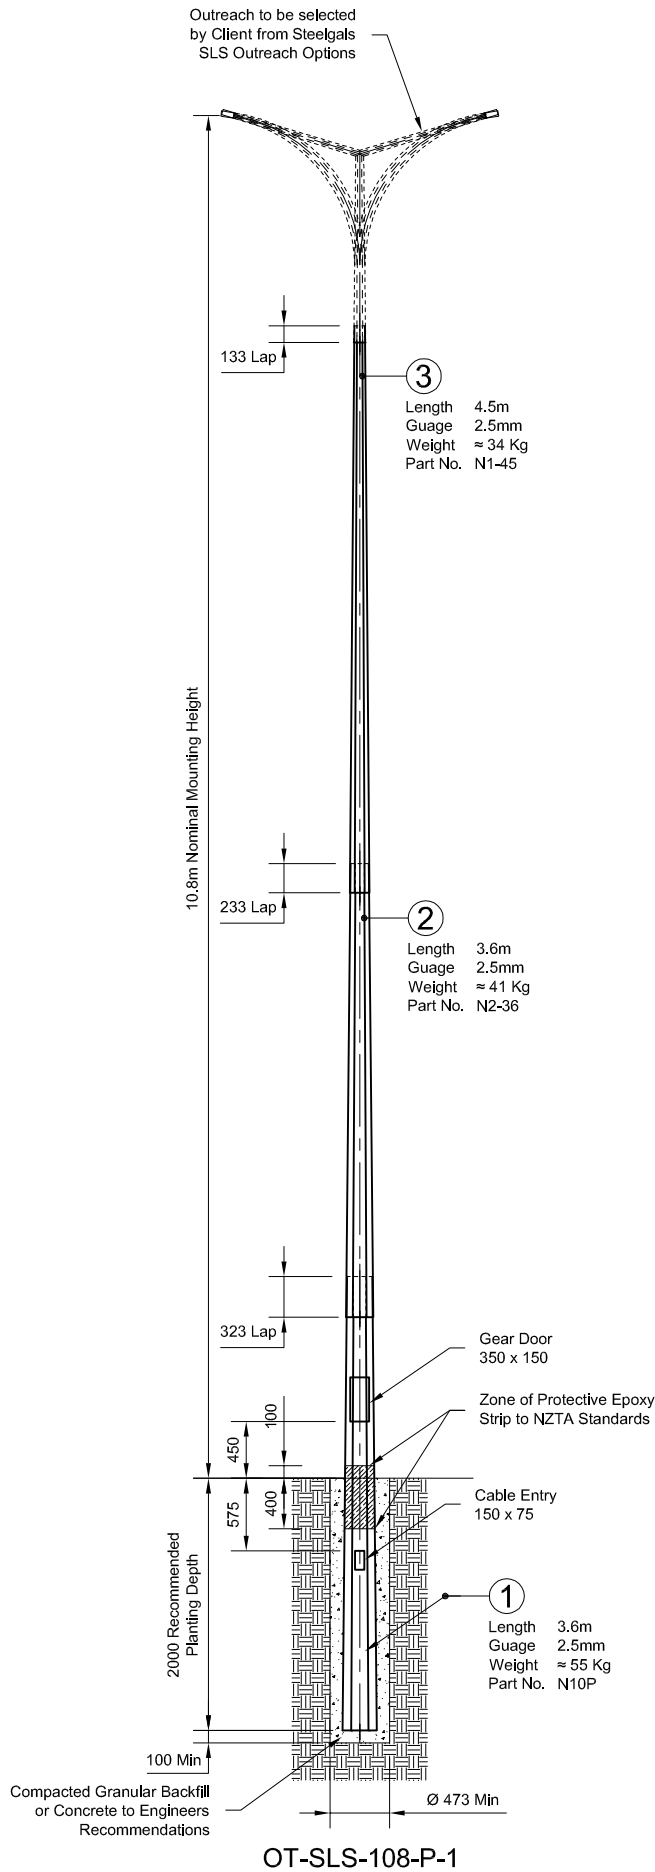

OT-SLS-108-P-1

### Technical Specification

#### Design Conditions

#### Standards

Pole Design	AS 4676 / AS 1170.2 Sect'n4 / NZS 4203
Material	EN 12767 Class 0 / BS 4360 / BS EN 10025
Welding (Electric Arc Welding)	AS 1554
Galvanising	AS / NZS 4680

#### Testing Procedures

Dimensional Verification  
Galvanising Thickness  
Material Thickness


#### Quality Control Procedures

The Supplier/Manufacturer and Galvanizer of the column shall be ISO 9001 : 2000 accredited

#### Finishing Types

Oven Baked Powder Coated  
High Performance Polyester UV Resistance.  
(formulated for galvanized surface)  
Hot Dip Galvanized  
2 Part Epoxy Coat (10 Years)

### SLS Outreach Options

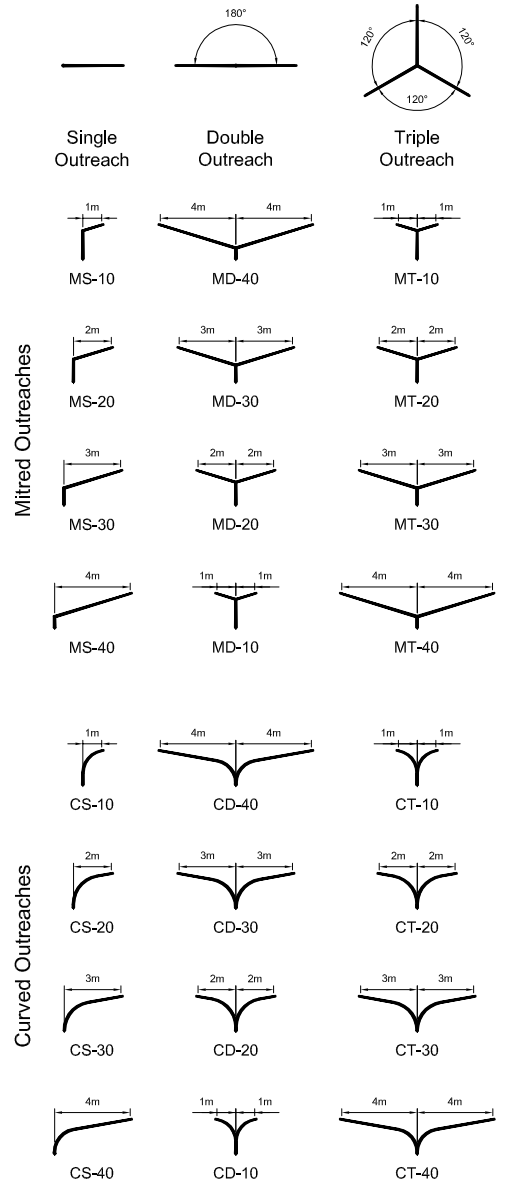

Curved and Mitred Outreaches are available in 0.5m increments and additional sizes, upto 5m, on request.

Drawn:	SMP			
Date:	26.07.2010			
Scale:	NTS			
Checked:				
Approved:				
Date:	20.09.2013			
Rev	Details	By	Chd	Date

Title:	10.8m Octagonal Streetlight Pole with Planted Base for Curved & Mitred Outreaches
Drawing Number:	OT-SLS-108-P-1
Customer:	



Steelgal Industries  
8 Trugood Drive  
East Tamaki Auckland  
P: 0800 736800  
F: (+649) 2724665  
E: sales@steelgal.co.nz  
W: www.steelgal.co.nz