

This drawing and the information contained herein, is the sole property of Steelgal NZ Limited and may not be used without consent from Steelgal NZ limited.

**Standards**

Pole Design AS 4676 / AS 1170.2 Sect'n4 / NZS 4203  
 Material EN 12767 Class 0 / BS 4360 / BS EN 10025  
 Welding (Electric Arc Welding) AS 1554  
 Galvanising AS / NZS 4680

**Testing Procedures**

Dimensional Verification  
 Galvanising Thickness  
 Material Thickness

**Quality Control Procedures**



The Supplier/Manufacturer and Galvanizer of the column shall be ISO 9001 : 2000 accredited

**Finishing Types**

Oven Baked Powder Coated  
 High Performance Polyester UV Resistance. (formulated for galvanized surface)  
 Hot Dip Galvanized  
 2 Part Epoxy Coat (10 Years)

**Foundation Design**

Foundation Design by others  
 PS1 Designs by Request

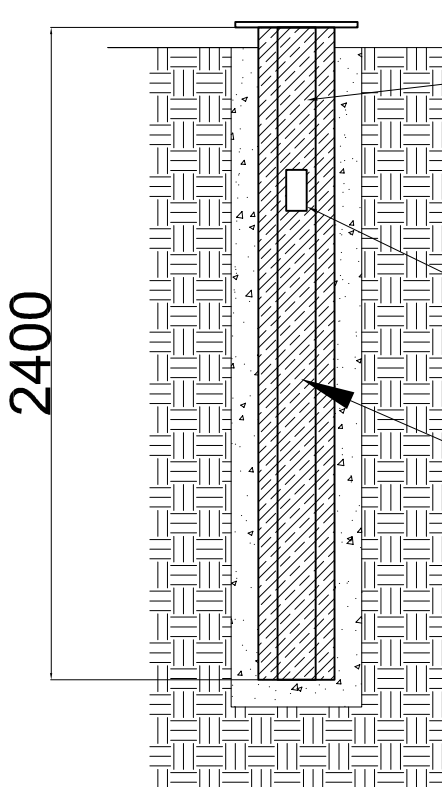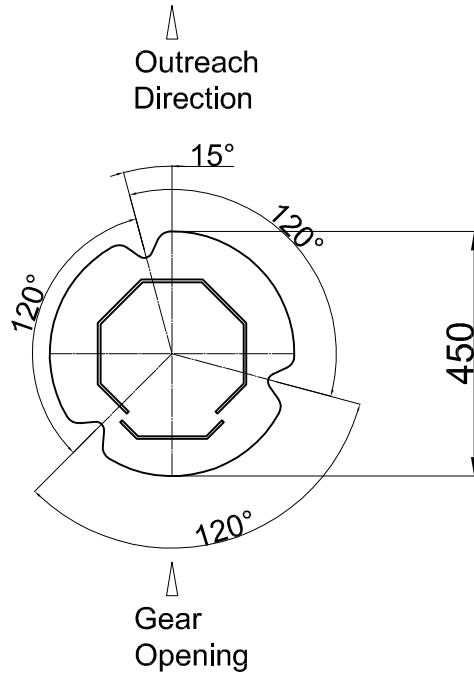

Sigmashield 880  
 2 pot epoxy paint

150 x 75  
 Cable Entry

1

Length 2.4m  
 Gauge 6.0mm  
 Weight ≈ 122 Kg  
 Part No. SS-24-6-C

				Drawn: DDC	Title:
				Date: Date	
				Scale: NTS	
				Checked:	
				Approved:	Drawing Number:
Details	By	CHD	Date:	Date:	Customer:



Steelgal NZ Limited  
 8 Trugood Drive  
 East Tamaki  
 Auckland  
 Ph: 09 2724665  
 Email:  
 Sales@steelgal.co.nz  
 www.steelgal.co.nz