


③  
 Length 3.6m  
 Gauge 2.5mm  
 Weight ≈ 27 Kg  
 Part No. N1-36

②  
 Length 3.6m  
 Gauge 2.5mm  
 Weight ≈ 41 Kg  
 Part No. N2-36

①  
 Length 3.6m  
 Gauge 2.5mm  
 Weight ≈ 55 Kg  
 Part No. N10P

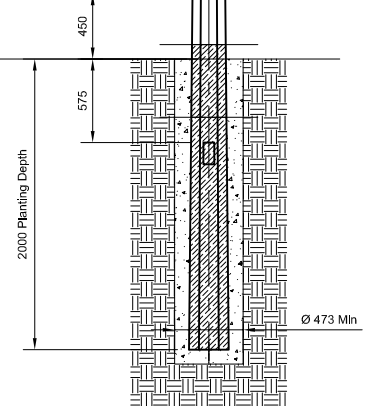

OT-SLS-099-P-1

<b>Standards</b>	
Pole Design	AS 4676 / AS 1170.2 Sect'n4 / NZS 4203
Material	EN 12767 Class 0 / BS 4360 / BS EN 10025
Welding (Electric Arc Welding)	AS 1554
Galvanising	AS / NZS 4680
<b>Testing Procedures</b>	
	Dimensional Verification Galvanising Thickness Material Thickness
<b>Quality Control Procedures</b>	
	The Supplier/Manufacturer and Galvanizer of the column shall be ISO 9001 : 2000 accredited
<b>Finishing Types</b>	
	Oven Baked Powder Coated High Performance Polyester UV Resistance. (formulated for galvanized surface) Hot Dip Galvanized 2 Part Epoxy Coat (10 Years)
<b>Foundation Design</b>	
	Foundation Design by others PS1 Designs by Request


**Other Information**

Gear Door - 300mm x 150mm

Cable Entry - 150mm x 75mm

Protective Epoxy Paint (Sigmashield 880) to NZTA and ATCoP Standards. From 100mm-200mm above ground level to section bottom.

This drawing and the information contained herein, is the sole property of Steelgal NZ Limited and may not be used without consent from Steelgal NZ Limited.

Rev	Details	By	Chd	Date	Drawn: DDC	Title: 9.9m Octagonal Streetlight Pole with Planted Base	 <p>Steelgal NZ Limited        8 Trugood Drive        East Tamaki Auckland        P: 0800 736600        F: (+649) 2724665        E: sales@steelgal.co.nz        W: www.steelgal.co.nz</p>
					Date: 23.05.2018	Drawng Number: OT-SLS-099-P-1	
					Scale: NTS	Customer:	
					Checked:		
					Approved:		
					Date:		